

FEATURES

2 units serially connected to provide 5.4V products


Lead terminal type

2-Pin terminal type according to customer's requirement




Drawing


I TYPE

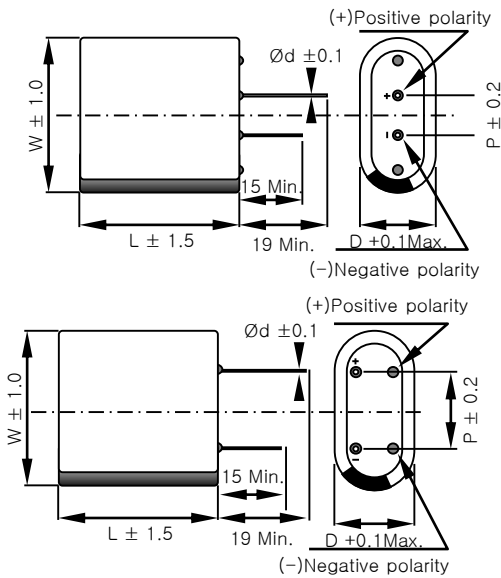

H TYPE

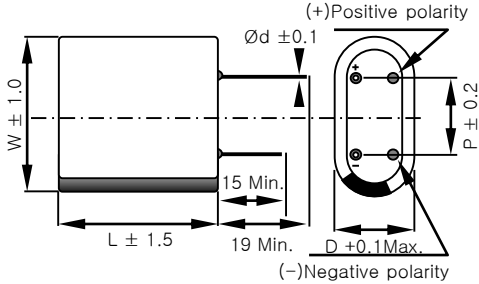

O TYPE

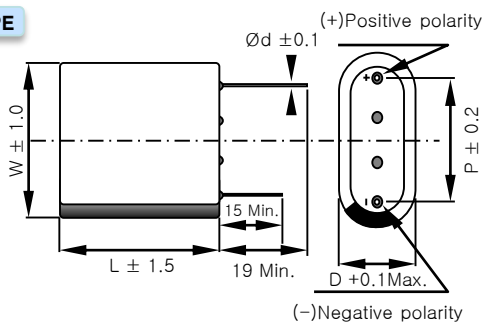

D = 10.5mm

TYPE	I	O	H
P	5.5	15.5	10.5

SPECIFICATION

ITEM		CHARACTERISTICS
Rated Voltage (V _R)		5.4 V
Operating Temperature		-40 ~ +65°C
Capacitance Tolerance		-10 ~ +30%
High Temp. Load Life	Measure	After 1,000 hours at V _R loaded under +65°C, capacitors meet the following criteria.
	Cap. Change	≤ 30% of initial value
	ESR Change	100% increase from specified value
Cycle Life Characteristics	Cycle	500,000
	Cap. Change	≤ 30% of initial value
	ESR Change	100% increase from specified value
	Condition	Cycle of Charge/discharge from V _R to 1/2V _R
Shelf Life		2 years
		No Electrical Charge, Temperature Below 70°C (ΔC : ≤10% of initial value / ΔESR : ≤ 50% of initial value)

Part Number	Rated Voltage (V)	Capacitance (F)	ESR (mΩ)		Max. Current (A)	Leakage Current (mA, 72hr)	Size (mm) D × W × L	Weight (g)	Volume (ml)
			AC(1kHz)	DC					
VEC5R4355QG	5.4	3.5	115	195	5.5	0.014	10.5×21×22.5	4.8	5.0

* Max. Current : 1 sec. discharge to 1/2V_R

* When do module more than 2 series, please fully discharge over 1 hour first, then assemble right after within 1 hour.